

22010

Roof Drain

Medium Sump, Beehive Dome



Specification

Josam 22010 series coated cast iron roof drain, medium beehive dome, non-puncturing clamp ring with integral gravel stop, medium sump with roof flange and bottom outlet.

Dome free
Area: 56 SQ. IN.

▼ Separate submittal for this option available.

** -10 Extension 1" standard.

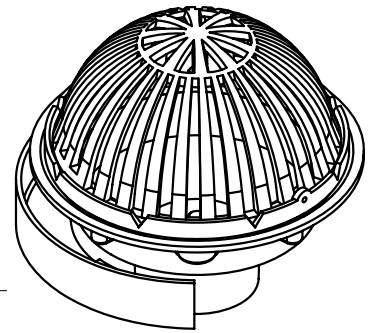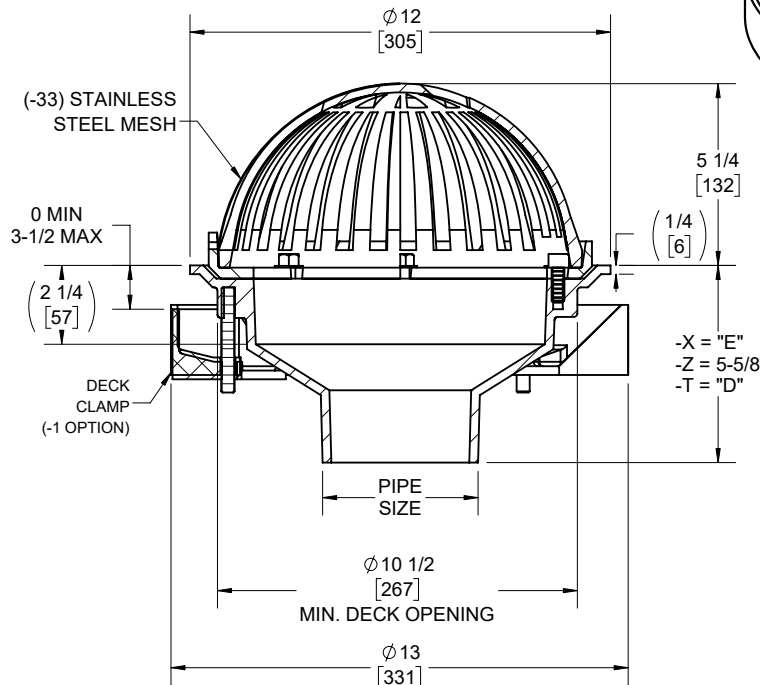

	2"	Pipe size
	3"	Pipe size
	4"	Pipe size
	5"	Pipe size
	6"	Pipe size
	-X	Inside caulk outlet
	-Z	No-hub spigot outlet
	-T	Threaded outlet
	-1	Deck clamp assembly
	-1C	Drain receiver clips (min. deck opening ϕ 16.5")
	-2	Drain receiver
	-3	Deck clamp asy. and drain receiver
	-3C	Drain receiver and drain receiver clips

		-10	Fixed ext. collar, cast iron (specify height **)
		-10-20	Fixed ext. collar, galvanized (specify height **)
	▼	-17	2" high solid clamping collar
	▼	-19	Clamp collar w/perf. stainless gravel guard
		-20	Galvanized cast iron parts
		-23	Rough bronze dome
		-26	Aluminum dome
		-33	Stainless steel mesh covered dome
		-66	No-hub side outlet (2" thru 6" outlets only)
		-VP	Vandal-proof dome
		-AER	Adjustable extension with threaded rod
		-ARE	Acid-resistant epoxy coating
		-IRMA	Perforated stainless steel extension

Pipe size	"D" Dim.	"E" Dim.
2"	4 3/4"	6 1/4"
3"	4 3/4"	6 1/4"
4"	4 1/2"	6 1/4"
5"	4 3/8"	6"
6"	4"	5 3/4"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

