

# 12684

## Closet Carrier

### Right Hand

#### Specification

Josam 12684 series coated cast iron single horizontal 4" no-hub right-hand offset fitting with 2" no-hub vent and adjustable carrier body, invertible for siphon jet or blowout closets, with ABS extension with integral test cap, pylon feet, anchor foot, plated hardware and neoprene fixture gasket.

△ For dimension shorter than 5-1/2" (1" min) cut extension. For longer extension (10-1/2" max) specify (-10).

☒ Recommend feet be secured to floor with 1/2" bolts and anchors (by others).


⊗ For siphon jet roughing over 6" or blowout roughing over 12-1/2" specify on order.

Siphon jet dims shown.  
For blowout dims, use:

□ Min 2" and max 4"

▱ Min 11" and max 16 1/2"

⊙ Aux inlet is 6" offset from vent.

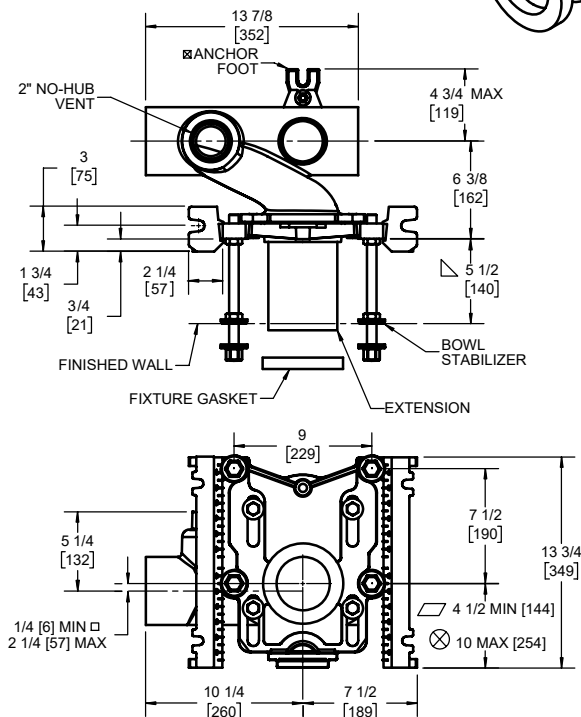

-XSD	Extra special duty 1,000 LB carrier
-PF	NPT FCPLT and ext - STD
-OR	O-ring FCPLT and ext
-CR	Comp. ring FCPLT and ext
-PAF	Prefab adjustable foot
-SD	Special-duty 500 LB carrier
-HS	Hub and spigot
-AUX	Auxiliary inlet (2" no-hub)
-HUB AUX	Auxiliary inlet (2" hub)
-VP	Vandal-proof trim

-SDH	Special duty high 750 LB carrier
-6	Supply pipe support (specify type of pipe)
-10	ABS extension through 10-1/2" wall
-24	Floor mounted back outlet china bowl
-30	Cast iron adj. extension with connector
-30-2	Cast iron adj. extension with connector and test cap
-32	Carrier for wide chase installations
-35	Carrier for wheelchair high rough
-58	Horizontal no-hub cast long barrel
-1	Positioning frame

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:



**A WATTS Brand**